


The **ACTF9022/900.0/DCC6** is a low-loss, wide band SAW filter in a surface-mount ceramic **DCC6** case for EGSM Tx applications etc. (Centre Frequency 900.0MHz)

1. Package Dimension (DCC6)

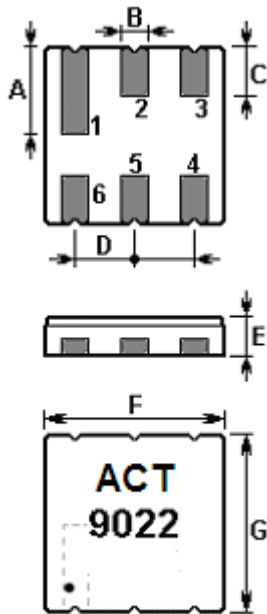


2.

Pin	Configuration
2	Input
5	Output
1,3,4,6	Ground

Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	1.9	E	1.2
B	0.64	F	3.8
C	1.0	G	3.8
D	1.27		

2-1. -- The dot indicates terminal 1

3. Matching Circuit

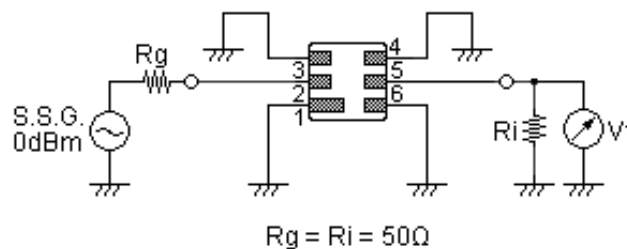

In keeping with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

Issue : 1.1 C1


For quotations or further information please contact us at:

Date : March 2010

3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK

<http://www.actcrystals.com>

4. Typical frequency response

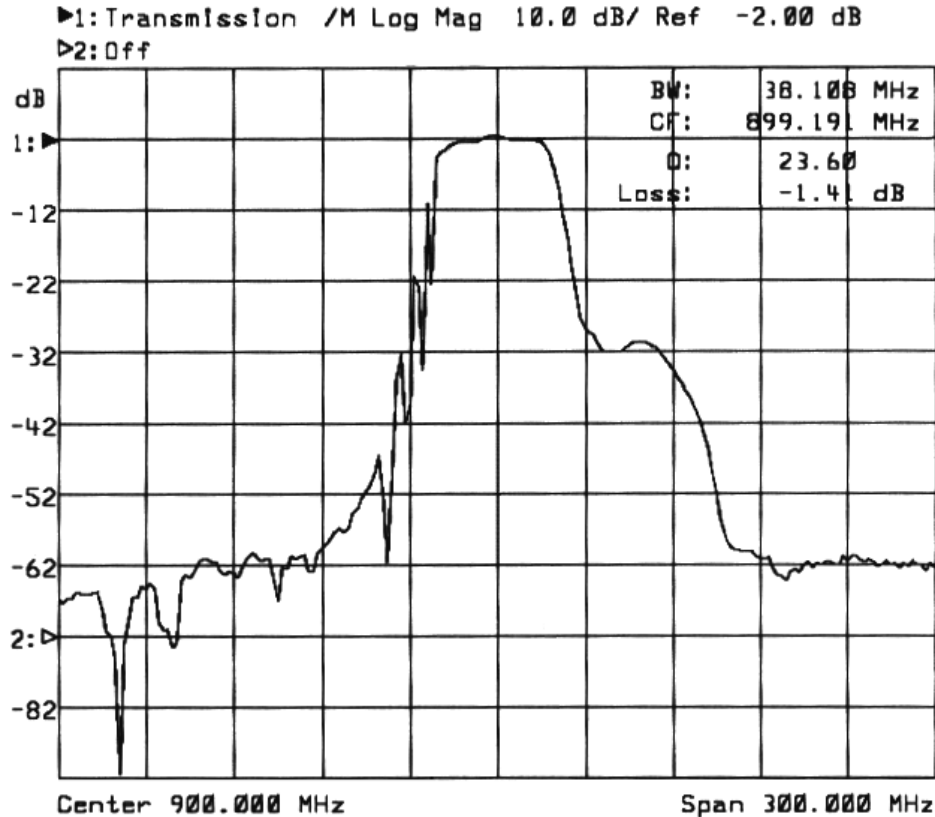

5. Performance

5-1. Maximum Ratings

Rating	Value	Unit
Input Power Level	10	dBm
DC Voltage	12	V
Storage Temperature Range	-40 to +85	°C
Operating Temperature Range	-10 to +65	°C

In keeping with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

For quotations or further information please contact us at:
3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK
<http://www.actcrystals.com>

Issue : 1.1 C1
 Date : March 2010

5-2. Electronic Characteristics

Parameter	Minimum	Typical	Maximum	Unit
Centre Frequency f_c	--	900.000	--	MHz
3dB Bandwidth BW_3	--	± 19	--	MHz
Usable Bandwidth BW_{USE}	--	± 15	--	MHz
Insertion Loss 885.00 MHz 915.00 MHz IL	--	2.7	3.6	dB
Amplitude Variation (p-p) 885.00 MHz 915.00 MHz $\Delta \alpha$	--	1.0	1.8	dB
Absolute Attenuation DC 840.00 MHz 930.00 MHz 960.00 MHz 990.00 MHz 2000.0 MHz α	48 20 48	57 28 58	-- -- --	dB
Input / Output Impedance	50			Ω

i CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

1. The frequency f_c is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR \leq 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter centre frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.

In keeping with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK

<http://www.actcrystals.com>

Issue : 1.1 C1

Date : March 2010