

# D1086-T110L-CC

## Acousto-Optic Modulator




1212

Compact AO Deflector designed for High Power Fibre and DPSS, NIR lasers. The unit incorporates four section acoustic beam steering to produce a flat scan response. Applications include high speed, sequential multi-point scanning or fast sweep operation.

### SPECIFICATIONS

Spectral Range:	0.36 > 1.5µm
Standard A/R Wavelengths:	1.1µm
Optical Power:	100 Watts **
Interaction Medium:	Tellurium Dioxide (TeO2)
Acoustic Velocity:	4.2mm/µs
Centre Frequency (Fc):	110MHz nominal
RF Bandwidth:	50MHz
Input Impedance:	50Ω Nominal
VSWR:	<1.5:1 @ Fc
Clear Aperture:	6.5mm
Active Aperture Height:	3mm
Static Insertion Loss	<3% at 1.1µm
Reflectivity:	< 0.5%/Surface
Laser Polarization:	Any
RF Power (total):	6 Watts nominal
Bragg Angle:	15 mrad
Typical Scan Angle:	13 mrad
Cooling:	Conduction to cooled surface required

### TYPICAL SCAN PERFORMANCE at 1.1µm \*

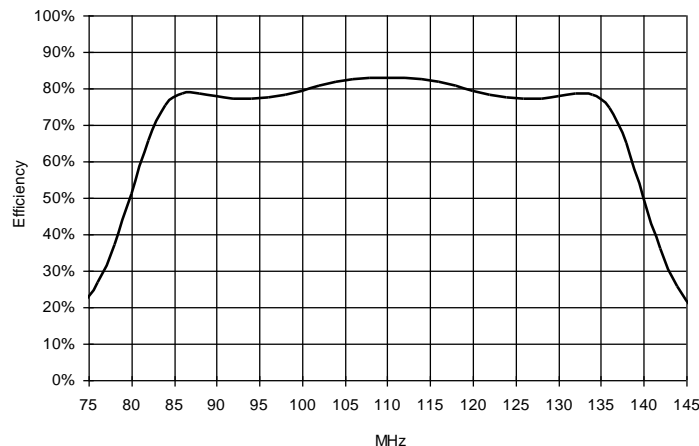

\* Single mode input

\*\* For higher powers please contact Isomet

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**


ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**

**In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding**




# D1086-T110L-CC

## Acousto-Optic Modulator



1212

### OUTLINE DRAWING (Dimensions: mm)

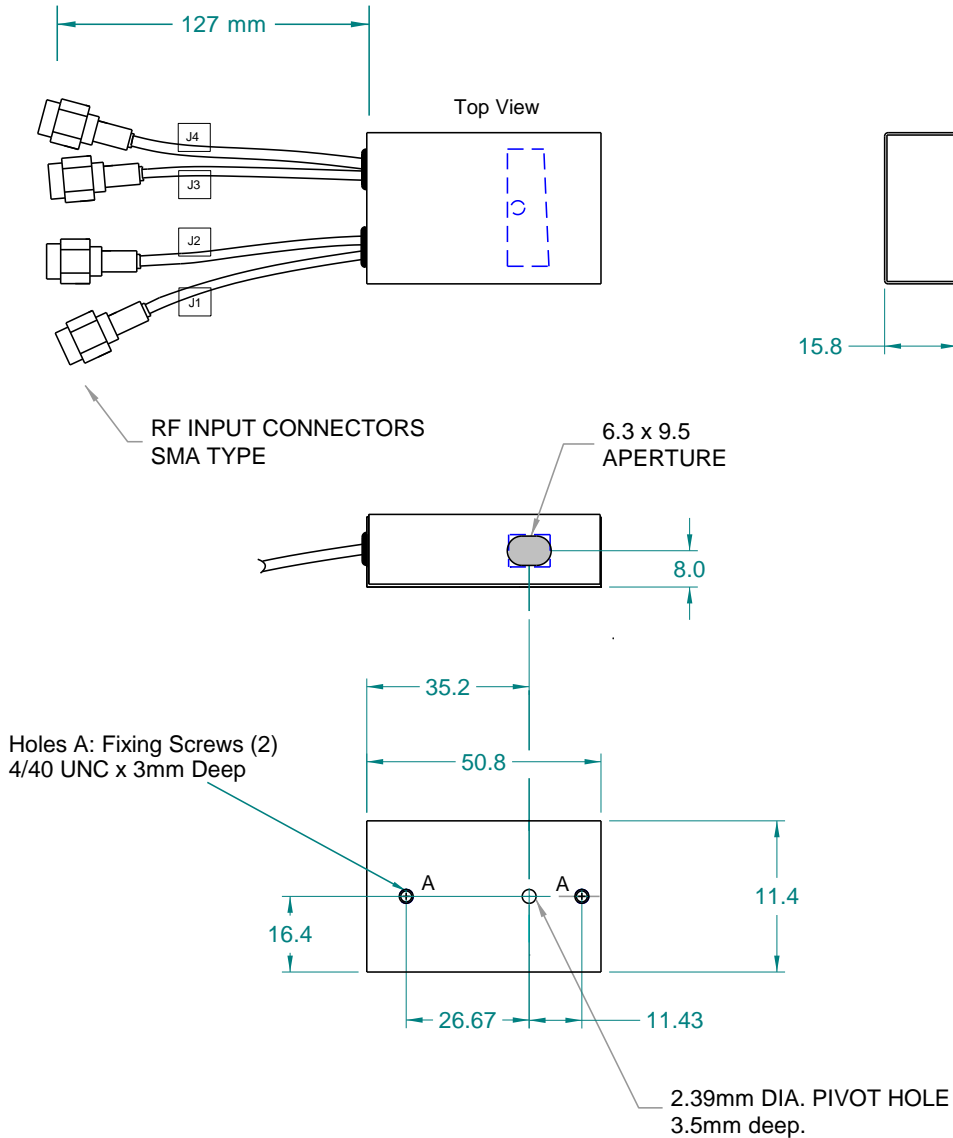

### Recommended Driver

Model RFA3110-4-CC

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

Quality Assured.

In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding