

SAW BANDPASS FILTER

PART NO.: ACTF9295_1842.5MHz_DCC6C

Product Type:	Customer:
SAW Filter	
Part NO.:	Customer Part NO.:
ACTF9295_1842.5MHz_DCC6C	
	Issued Date:

PREPARED BY	CHECKED BY	APPROVED BY

In line with our ongoing policy of product evolution and improvement, the above specification may subject to change without notice

ISO9001 Registered


For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK

<http://www.actcrystals.com>


Features

- Low-loss RF filter for mobile systems
- Low amplitude ripple
- No matching network required for operation at 50Ω
- Ceramic package for **Surface Mounted Technology (SMT)**
- Lead-free production and **RoHS** compliant

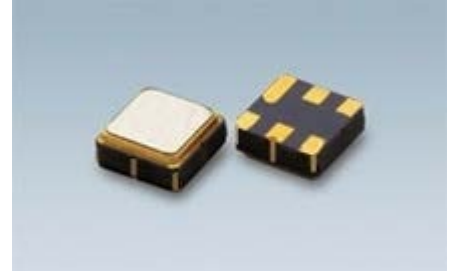

Package Dimensions


Ceramic Package: **DCC6C**

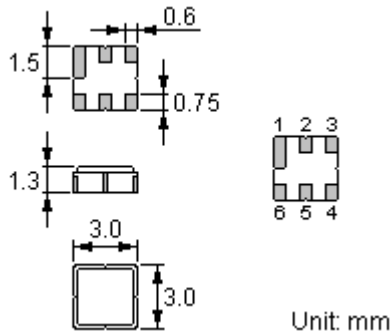

Pin Configuration

2	Input
5	Output
1, 3, 4, 6	Ground

Marking



Top View, Laser Marking

"ACT": Manufacturer's mark

"F": SAW filter

"9295": Part number

"-": Terminal 1

"*": Lot number (The code shown below varies in a 4-year cycle)

Code	1	2	3	4	5	6	7	8	9	10	11	12
2009	A	B	C	D	E	F	G	H	J	K	L	M
2010	N	P	Q	R	S	T	U	V	W	X	Y	Z
2011	a	b	c	d	e	f	g	h	i	j	k	m
2012	n	p	q	r	s	t	u	v	w	x	y	z

Maximum Ratings

Rating		Value	Unit
Input Power Level	P	10	dBm
DC Voltage	V_{DC}	6	V
Operating Temperature Range	T_A	-40 ~ +85	°C
Storage Temperature Range	T_{stg}	-40 ~ +85	°C


Electrical Characteristics

Item		Minimum	Typical	Maximum	Unit
Center Frequency	f_c		1842.5		MHz
Insertion Loss	IL				
	1805.00 1880.00 MHz	--	2.8	4.0	dB
Group Delay Ripple	1805.00 1880.00 MHz		10	30	ns
Absolute Attenuation	α				
	DC 1720.00 MHz	19	21		dB
	1720.00 1765.00 MHz	25	30		dB
	1765.00 1785.00 MHz	6	16		dB
	1920.00 1930.00MHz	15	38		dB
	1930.00 3120.00 MHz	20	24		dB
	3120.00 4000.00 MHz	17	30		dB
Amplitude Ripple (p-p)	1805.00 1880.00 MHz	$\Delta\alpha$	1.0	2.5	dB
Input VSWR	1805.00 1880.00 MHz		2.3: 1	3.0: 1	
Output VSWR	1805.00 1880.00 MHz		2.3: 1	3.0: 1	
Input / Output Impedance (Nominal)			50		Ω


 RoHS Compliant

 Electrostatic Sensitive Device

Typical Frequency Response

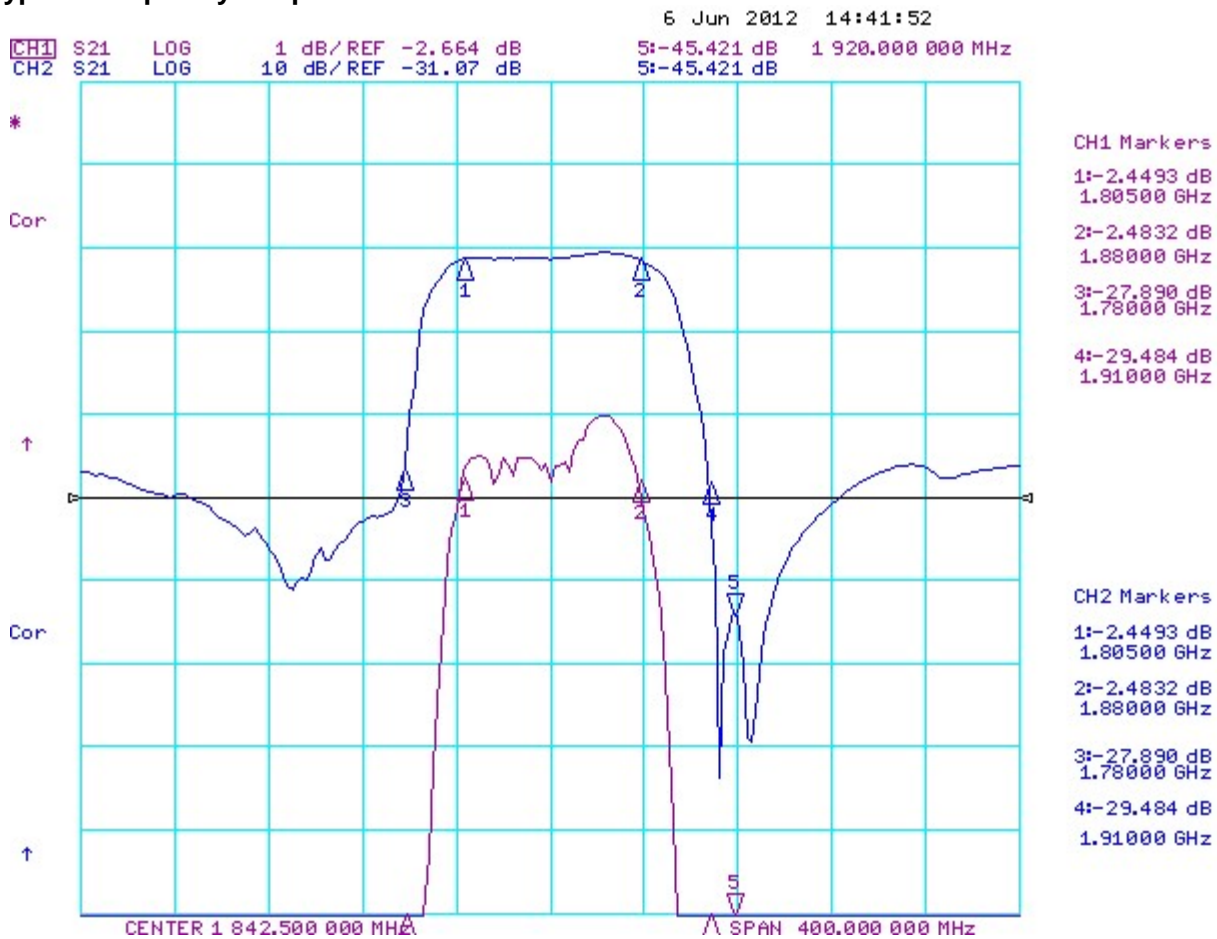

6 Jun 2012 14:42:22

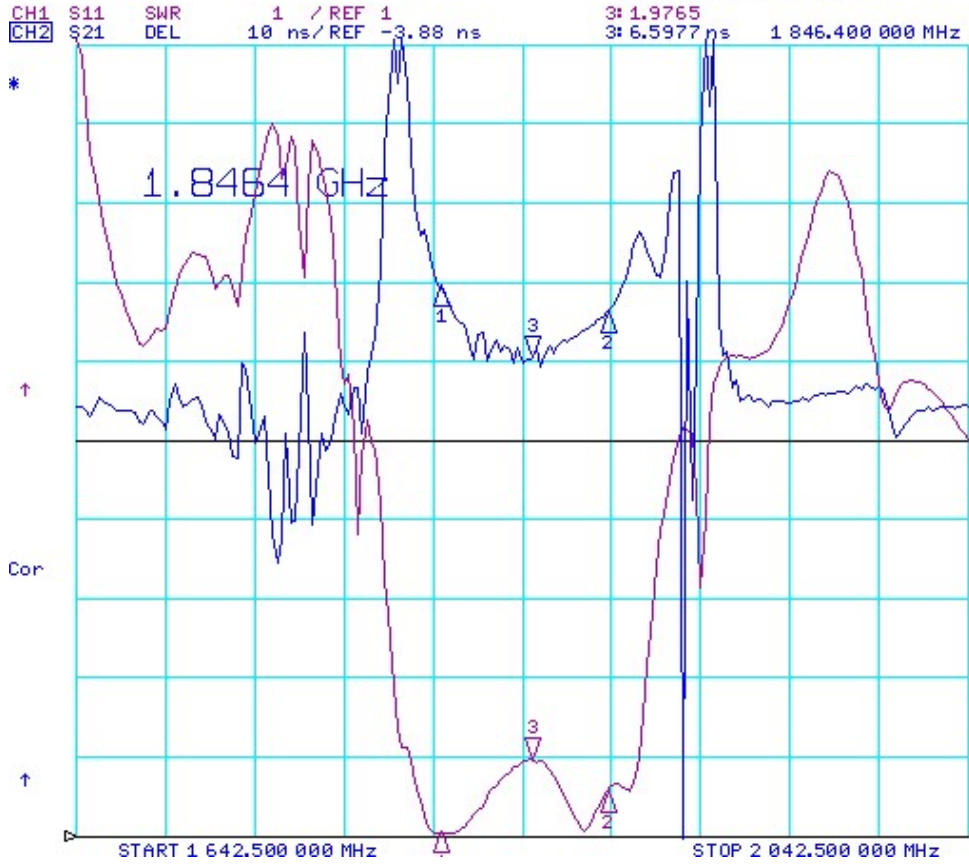


CH1 Markers

- 1: 1.0322
1.80500 GHz
- 2: 1.5441
1.88000 GHz

CH2 Markers

- 1: 15.648 ns
1.80500 GHz
- 2: 12.187 ns
1.88000 GHz

6 Jun 2012 14:43:07

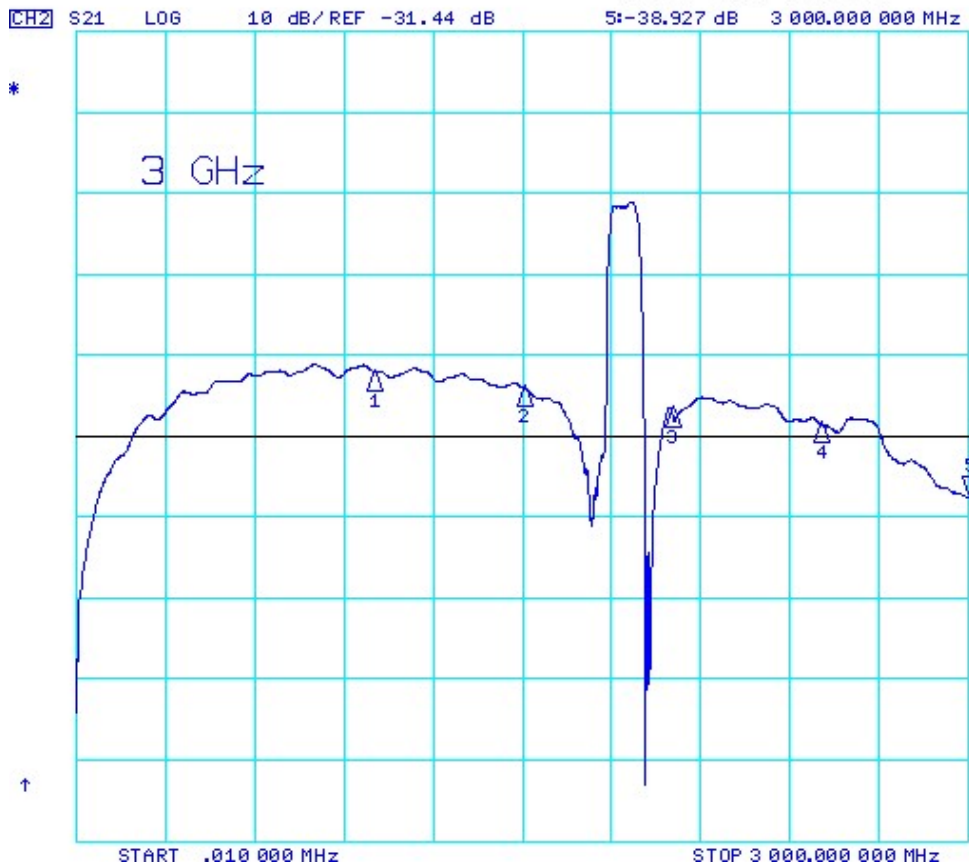

CH2 Markers

- 1: -23.474 dB
1.00000 GHz
- 2: -25.423 dB
1.50000 GHz
- 3: -28.057 dB
2.00000 GHz
- 4: -29.867 dB
2.50000 GHz

Stability Characteristics


	Test item	Condition of test
1	Mechanical shock	(a) Drops: 3 times on concrete floor (b) Height: 1.0 m
2	Vibration resistance	(a) Frequency of vibration: 10~55Hz (c) Directions: X,Y and Z (b) Amplitude: 1.5 mm (d) Duration: 2 hours
3	Moisture resistance	(a) Condition: $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$, $93.3\% \text{ RH}$. (b) Duration: 96 hours (c) Wait 4 hours before measurement
4	Climatic sequence	(a) $+70^{\circ}\text{C}$ for 16 hours (c) -25°C for 2 hours (e) Wait 4 hours before measurement (b) $+55^{\circ}\text{C}$ for 24 hours, 90~95% R.H. (d) $+40^{\circ}\text{C}$ for 24 hours, 90~95% R.H.
5	High temperature exposure	(a) Temperature: 85°C (c) Wait 4 hours before measurement (b) Duration: 250 hours
6	Temperature cycling	(a) $+85^{\circ}\text{C}$ for 30 minutes \Rightarrow -40°C for 30 minutes repeated 120 times (b) Wait 4 hours before measurement

Requirements: The SAW filter shall remain within the electrical specifications after tests.


Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Test Circuit

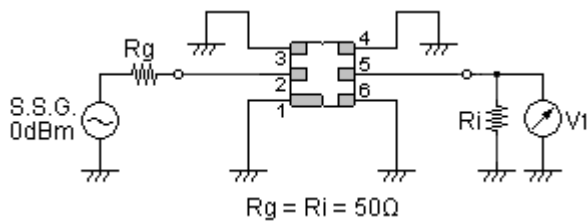


Recommended Land Pattern

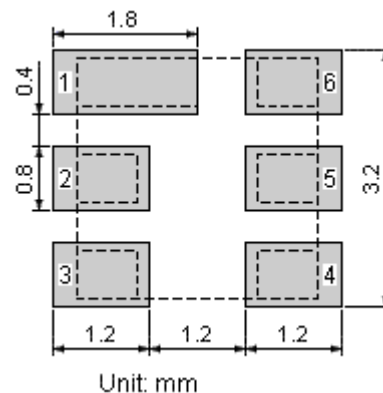


Packing Information

Carrier Tape

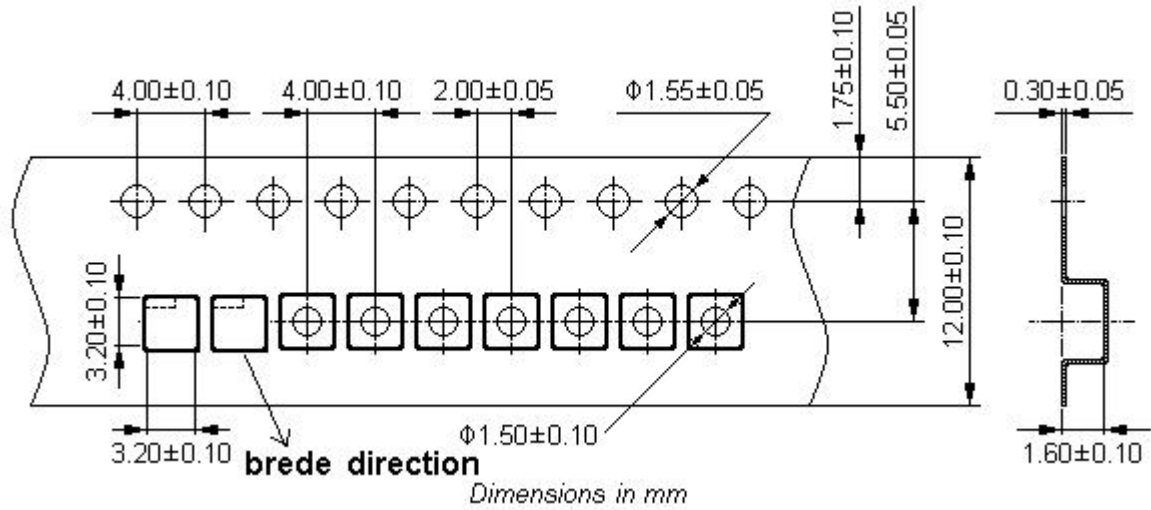

Reel Dimensions

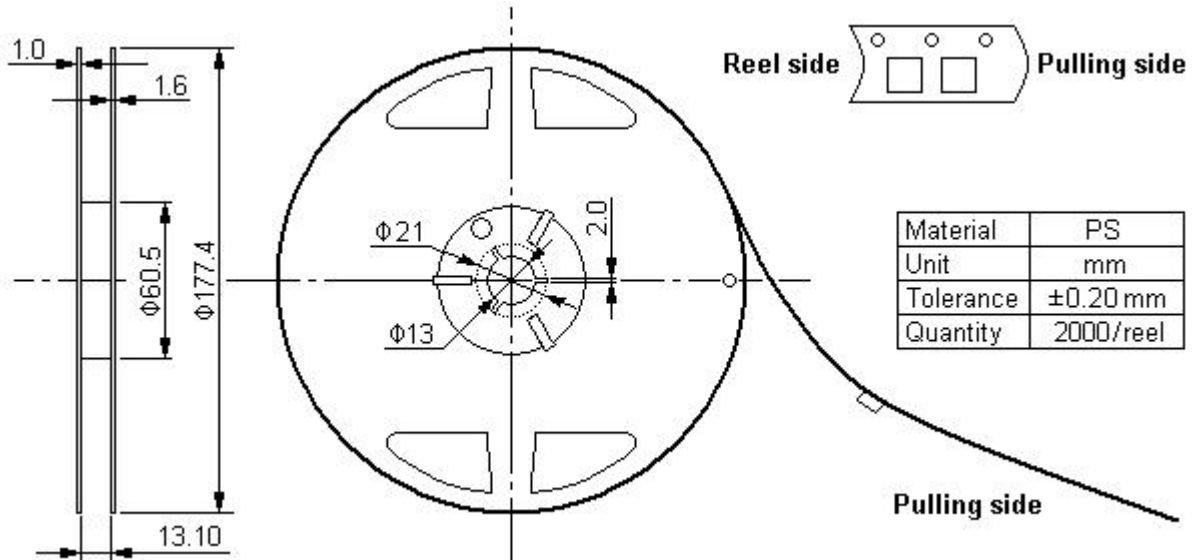


Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	10000	190×190×95	anti-static plastic bag & carton box 1 reel / bag	0.85
Carton Box II	20000	190×190×190	5 bags / box (10000 pcs) 10 bags / box (20000 pcs)	1.80

Unit: mm

Unit: kg

Recommended Soldering Profile

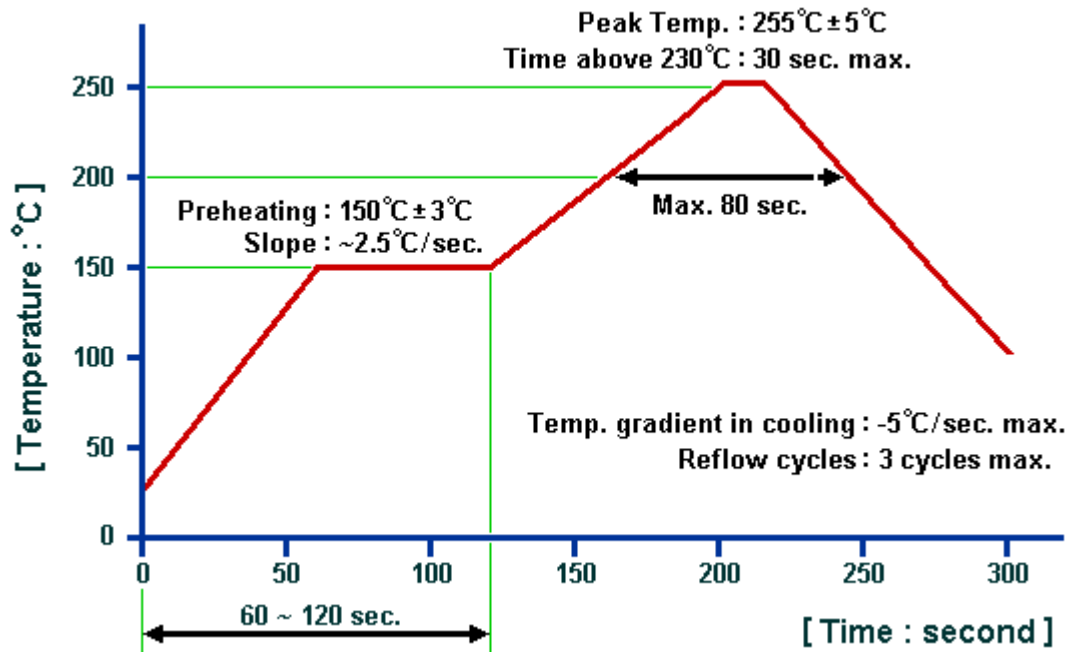

© ACT 2012. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.