


# WINSLOW ADAPTICs

## Data Sheet – 0.64mm Square Post Unshrouded Header W81136T38xxRC and W81136G03xxRC series

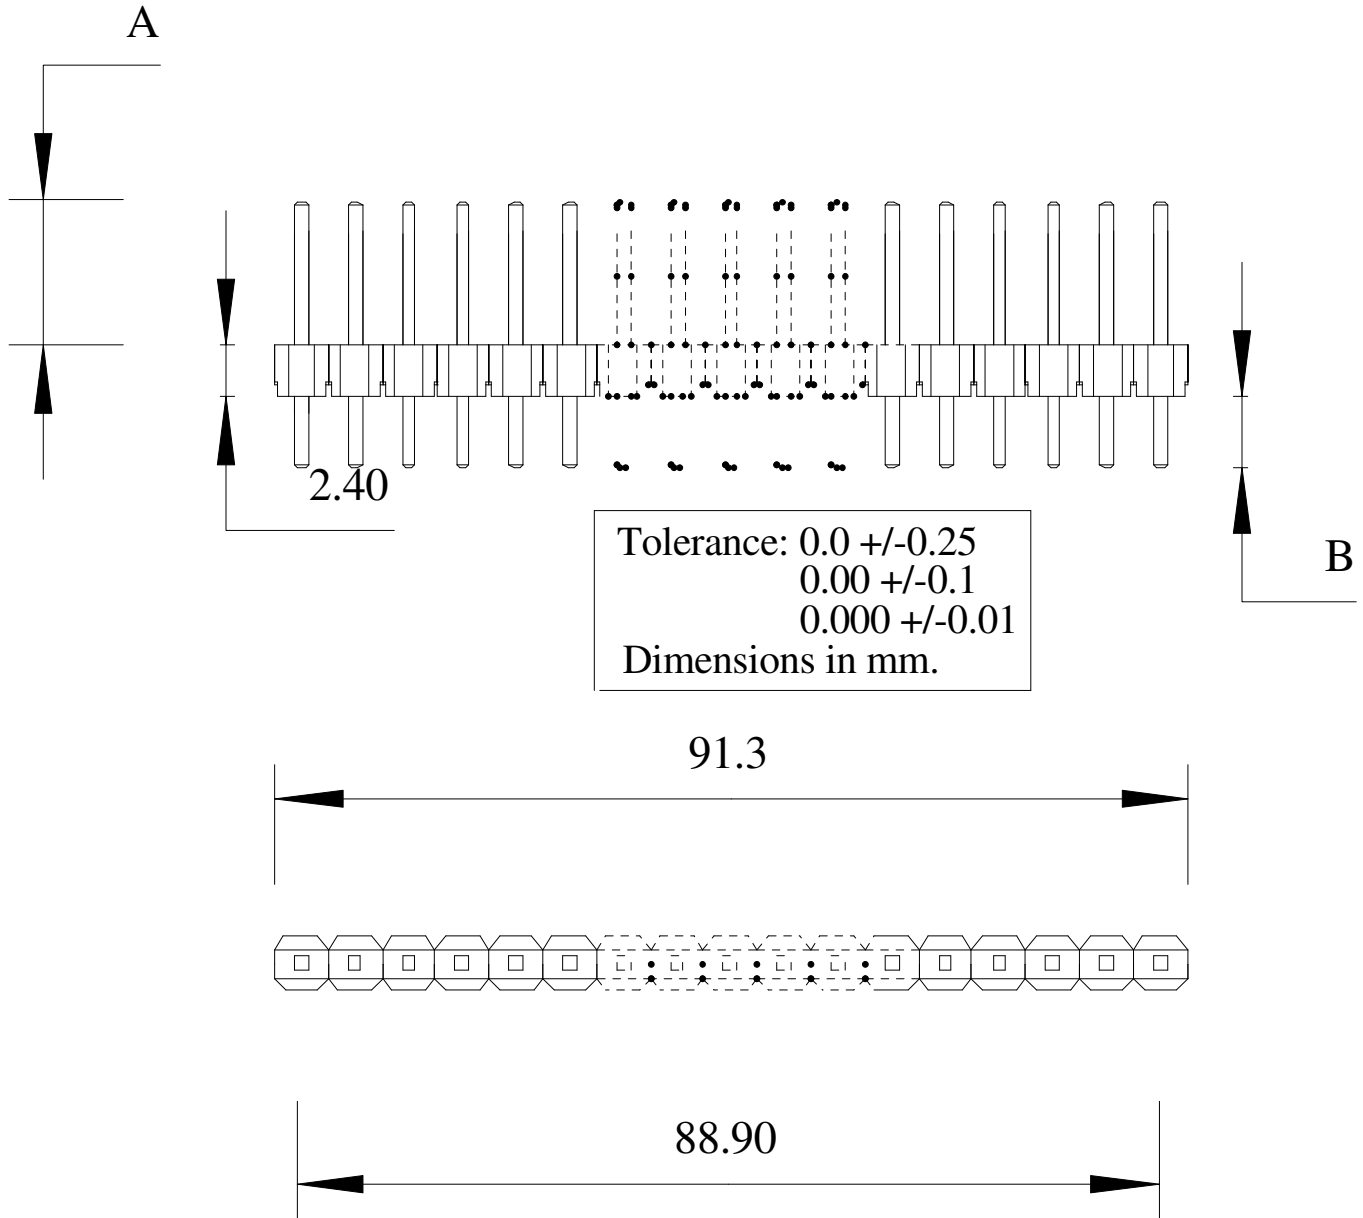

Also available from Winslow Adaptics are cost effective, time saving solutions to test, obsolescence, supply problems and upgrades. OEMs can upgrade equipment with custom Adaptics utilising additional logic, often saving considerable cost and time on re-design. If lead-time becomes an issue contact us for a suitable package converter. We specialise in conversion of all package lead-frames. For further information please contact your nearest sales office

# WINSLOW ADAPTICs

## Data Sheet – 0.64mm Square Post Unshrouded Header W81136T38xxRC and W81136G03xxRC series

Replace 'xx' in part number with desired suffix from list below  
36 is the maximum number of pins for the SIL version—replace to required size

SUFFIX	DIM A	DIM B
40	3.00	4.60
41	3.50	3.50
00	5.70	2.56
06	5.70	3.06
30	5.70	5.80
02	5.70	7.56
09	5.70	10.06
10	5.70	12.76
11	5.80	2.54
01	5.80	2.96
05	5.80	3.46
08	6.00	4.96
39	6.00	19.00
15	6.70	3.26
14	7.00	2.96
25	7.00	3.00
28	7.00	5.11
18	7.00	10.06
23	7.50	2.54
07	8.50	2.46
26	8.50	3.00
24	9.00	2.54
37	11.00	3.06
17	12.00	4.46
16	12.70	3.06
29	12.70	5.11
12	12.75	5.73
27	12.90	3.00
13	14.50	2.96

Can't see what you want? Call us with your enquiry: 0044 1874 625555

# WINSLOW ADAPTICS

## Data Sheet – 0.64mm Square Post Unshrouded Header W81136T38xxRC and W81136G03xxRC series

General Specifications. Unless stated all values are typical.

### **Contact**

Resistance: 20 Milliohms Max  
 Current Rating: 1 amp max.  
 Dielectric Withstanding Voltage: AC 650 Volts RMS at Sea Level  
 Material: Half Hard Brass.  
 Plating: Tin: 6.0 microns pure bright tin over 2.5 microns nickel.  
 Gold: Au/Ni 0.10µm Gold over 2.5µm Nickel

### **Moulding**

Material: 30% Glass Fibre-Reinforced Polyester (Polybutylene Terephthalate - PBT)  
 Insulation Resistance: 5000 Megohms (contact to contact) at 500VDC  
 Arc Resistance: 145 seconds at 23 degrees C  
 Electrical Strength: 121KV/cm at 23 degrees C  
 Dielectric Constant: 3.9 (48 hrs 90%RH) at 100Hz 23 degrees C  
 4.5 at 100Hz 121 degrees C  
 3.7 (48 hrs 90%RH) at 1MHz 23 degrees C  
 4.3 at 1MHz 121 degrees C  
 Dissipation Factor: 0.0077 (48 hrs 30%RH) at 100Hz 23 degrees C  
 0.0300 at 100Hz 121 degrees C  
 0.0150 (48 hrs 30%RH) at 1MHz 23 degrees C  
 0.0200 at 1MHz 121 degrees C  
 Volume Resistivity: 3 x 10<sup>13</sup>ohms-CM (48 hrs 90%RH) at 25 degrees C  
 10<sup>13</sup>ohms-CM at 121 degrees C  
 Operating Temperature: -65 to 150 degrees C  
 Flammability: UL94V-0


[sales@winslowadaptics.com](mailto:sales@winslowadaptics.com)

DIP Support products from Winslow Adaptics


[www.winslowadaptics.com](http://www.winslowadaptics.com)




Custom Upgrades



Package



Conversion



Pitch Change

Also available from Winslow Adaptics are cost effective, time saving solutions to test, obsolescence, supply problems and upgrades. OEMs can upgrade equipment with custom Adaptics utilising additional logic, often saving considerable cost and time on re-design. If lead-time becomes an issue contact us for a suitable package converter. We specialise in conversion of all package lead-frames.